
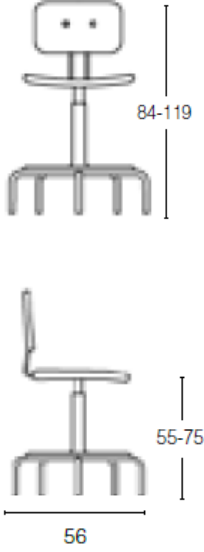


GRENDENE

CHAIRS

<p>TECHNICAL SHEET</p> <p>MOD. 1109</p> <p>BEECH WOOD</p>		
<p>DESCRIPTION</p>	<p>: Stool in multilayers of beech wood</p>	
<p>STRUCTURE</p>	<p>: Chromed steel pipe</p>	
<p>BASE</p>	<p>: Chromed 5-leg base, round pipe \varnothing 20 mm 1,5 mm thick, with welded footing in pipe \varnothing 14 mm; footing \varnothing 460 mm</p>	
<p>GAS SPRING</p>	<p>: Chromed steel pipe \varnothing 50x1,5 Gas high adjustment, stroke 200</p>	
<p>PLATE</p>	<p>: Plate in pressed sheet metal 30/10 thickness, painted</p>	
<p>SEAT AND BACKREST</p>	<p>: Multilayers of natural painted beech wood 10 mm thick Steel rod backrest support 10 mm</p>	
<p>PACKAGING</p>	<p>: N. 01 per carton</p>	
<p>WEIGHT</p>	<p>: Kg 8</p>	
<p>CUBAGE</p>	<p>: Cbm 0,08</p>	

All measurements must be considered indicative.

Measures vary according to the finish of the product and the presence of castors or glides.

Update Dec. 202


GRENDENE

CHAIRS

TECHNICAL SHEET

MOD. 1109

PADDED VERSION

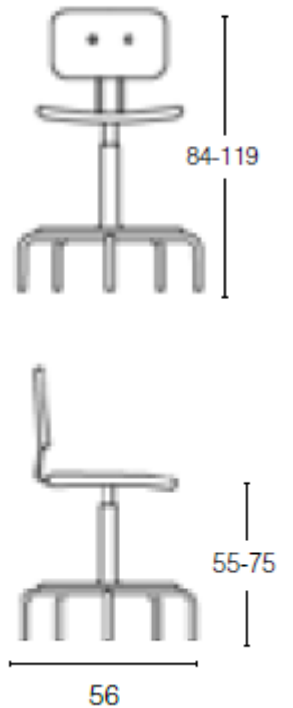

DESCRIPTION

: Padded stool

STRUCTURE

: Chromed steel pipe

BASE

: Chromed 5-leg base, round pipe \varnothing 20 mm 1,5 mm thick, with welded footing in pipe \varnothing 14 mm; footing \varnothing 460 mm

PLATE

: Plate in pressed sheet metal 30/10 thick, painted

GAS SPRING

: Chromed steel pipe \varnothing 50x1,5
Gas high adjustment, stroke 200

INTERNAL SEAT AND BACKREST

: Multilayers of beech and poplar wood 10 mm thick
Steel rod backrest support \varnothing 10 mm

PADDINGS

: Polyurethane resin
Backrest 30 mm thick Density 30
Seat 40 mm thick Density 30

UPHOLSTERY	:	According to upholstery chart
PACKAGING	:	N. 01 per carton
WEIGHT	:	Kg 8
CUBAGE	:	Cbm 0,08

All measurements must be considered indicative.

Measures vary according to the finish of the product and the presence of castors or glides.

Update Dec. 202


GRENDENE

CHAIRS

TECHNICAL SHEET

MOD. 1109

POLYURETHANE

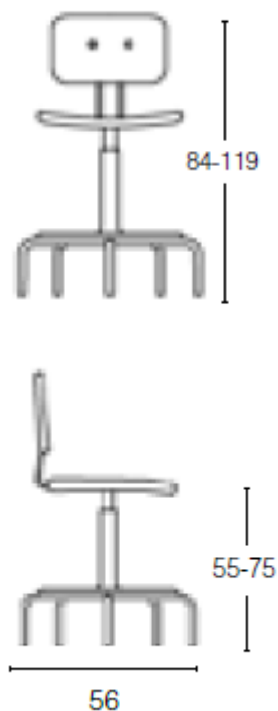

DESCRIPTION

: Padded stool

STRUCTURE

: Chromed steel pipe

BASE

: Chromed 5-leg base, round pipe \varnothing 20 mm 1,5 mm thick, with welded footing in pipe \varnothing 14 mm; footing \varnothing 460 mm

PLATE

: Plate in pressed sheet metal 30/10 thick, painted

GAS SPRING

: Chromed steel pipe \varnothing 50x1,5
Gas high adjustment, stroke 200

SEAT AND BACKREST

: Integral black polyurethane

PACKAGING

: N. 01 per carton

WEIGHT	:	Kg 8
CUBAGE	:	Cbm 0,08

All measurements must be considered indicative.
Measures vary according to the finish of the product and the presence of castors or glides.

Update Dec. 202