
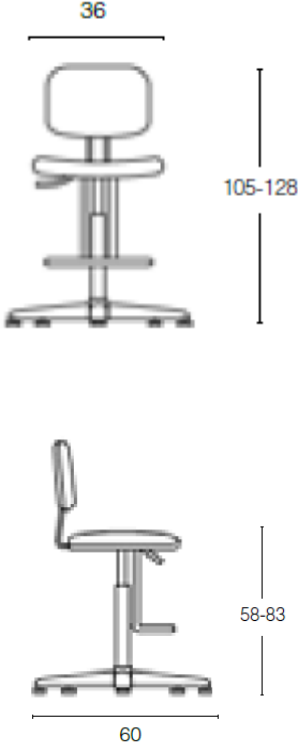


GRENDENE

CHAIRS

<p>TECHNICAL SHEET</p> <p>MOD. 1215</p> <p>BEECH WOOD</p>		
<p>DESCRIPTION</p> <p>BASE</p> <p>GLIDES</p> <p>GAS SPRING</p> <p>PLATE</p> <p>FOOTREST</p> <p>SEAT AND BACKREST</p>	<p>: Stool in multilayer of beech wood, available with castors</p> <p>: 5 – spoke chromed steel base, semi – oval tube 40x20x1,5</p> <p>: Polypropylene glides with steel insert Ø 11</p> <p>: Chromed steel pipe Ø 50x1,5 Gas height adjustment stroke 265 mm</p> <p>: Plate in pressed sheet metal 30/10 thickness, painted</p> <p>: Footrest in chromed steel rod Ø 11 mm</p> <p>: Multilayers of beech and poplar wood 10 mm thick</p>	

BACKREST STRUCTURE : Chromed steel rod Ø 10 mm, in height and depth adjustable

PACKAGING : N. 01 piece per carton

WEIGHT : Kg 10

CUBAGE : Cbm 0,10

N.B. Tutte le misure sono da considerarsi indicative.

Le misure variano a seconda della finitura del prodotto e della presenza di ruote o piedini.

GRENDENE

CHAIRS

TECHNICAL SHEET

MOD. 1215

UPHOLSTERED VERSION



DESCRIPTION	:	Stool with padded and upholstered seat and backrest, with glides
BASE	:	5 – spoke chromed steel base, semi – oval tube 40x20x1,5
GLIDES	:	Polypropylene glides with steel insert Ø 11
GAS SPRING	:	Chromed steel pipe Ø 50x1,5 Gas height adjustment stroke 265 mm
PLATE	:	Plate in pressed sheet metal 30/10 thickness, painted
FOOTREST	:	Footrest in chromed steel rod Ø 11 mm
INTERNAL SEAT AND BACKREST	:	Multilayers of beech and poplar wood 10 mm thick, padded and upholstered
BACKREST STRUCTURE	:	Chromed steel rod Ø 10 mm, in height and depth adjustable

IMBOTTITURE : Polyurethane resin
Backrest 30 mm thick Density 30
Seat 40 mm thick Density 30

PACKAGING : N. 01 piece per carton

WEIGHT : Kg 10

CUBAGE : Cbm 0,10

All measurements must be considered indicative.

Measures vary according to the finish of the product and the presence of castors or glides.


GRENDENE

CHAIRS

TECHNICAL SHEET

MOD. 1215

POLYURETHANE



DESCRIPTION : Stool with polyurethane seat and backrest, with glides

BASE : 5 – spoke chromed steel base, semi – oval tube 40x20x1,5

GLIDES : Polypropylene glides with steel insert Ø 11

GAS SPRING : Chromed steel pipe Ø 50x1,5
Gas height adjustment stroke 265 mm

PLATE : Plate in pressed sheet metal 30/10 thickness, painted

FOOTREST : Footrest in chromed steel rod Ø 11 mm

INTERNAL SEAT AND BACKREST : Multilayers of beech and poplar wood 10 mm thick, padded and upholstered

BACKREST STRUCTURE	:	Chromed steel rod Ø 10 mm, in height and depth adjustable
IMBOTTITURE	:	Integral rigid polyurethane
PACKAGING	:	N. 01 piece per carton
WEIGHT	:	Kg 10
CUBAGE	:	Cbm 0,10

All measurements must be considered indicative.

Measures vary according to the finish of the product and the presence of castors or glides.

Update Dec. 2021